


# Technical data sheet

Roof conductor holder for ridge tiles, 185–260 mm, Rd 8–10, CU  
Item number: 5202590

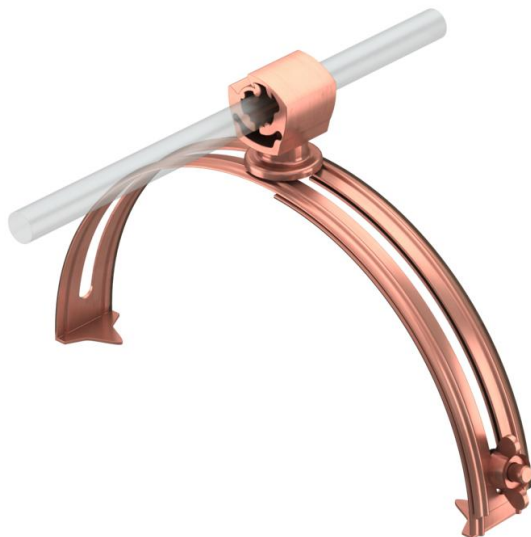

132/...: Roof conductor holder for ridge tiles

- Adjustable width from 185-260 mm
- Bottom part made of non-rusting stainless steel (V2A) or of copper
- Infinitely adjustable conductor holder
- Conductor holder of polyamide
- For round conductor Rd 8-10
- Fast installation using wing screw

**Cu** Copper

## Master data

|                     |                       |
|---------------------|-----------------------|
| Item number         | 5202590               |
| Type                | 132 K-CU              |
| Description 1       | Roof conductor holder |
| Description 2       | for ridge tiles       |
| Manufacturer        | OBO                   |
| Dimension           | 8mm                   |
| Material            | Copper                |
| Smallest sales unit | 10                    |
| Unit of quantity    | Piece                 |
| Weight              | 11.6 kg               |
| Weight unit         | kg/100 pc.            |

## Technical data

|                          |                 |
|--------------------------|-----------------|
| Application              | Ridge           |
| Conductor fastening type | With clamp clip |
| Conductor diameter, max. | 10              |
| Conductor diameter, min. | 8               |
| Mounting type            | Tensionable     |
| Mounting height          | 20 mm           |
| Fit                      | Rd 8-10 mm      |
| Clamping range D, max.   | 260 mm          |

# Technical data sheet

Roof conductor holder for ridge tiles, 185–260 mm, Rd  
8–10, CU  
Item number: 5202590



## Technical data

|                         |                       |
|-------------------------|-----------------------|
| Clamping range D, min.  | 185 mm                |
| Material of the holder  | Copper                |
| Material of the support | Rustproof steel (V2A) |