


# Technical data sheet

## Screw plug, PG thread

Item number: 2090422

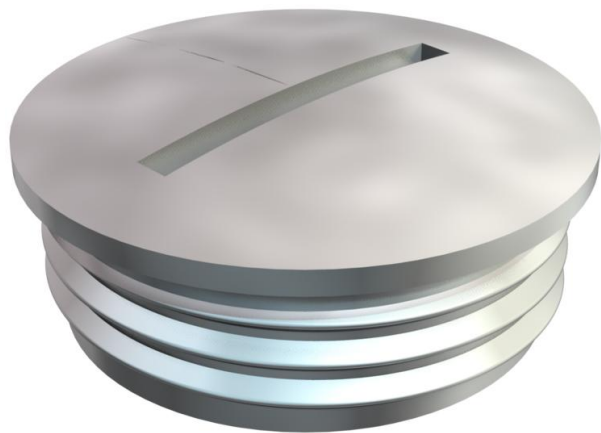

Screw plug N in accordance with DIN 46320, with PG thread to DIN 40430.

In conjunction with sealing ring, types 107, 170 or 171, protection rating IP68 (5 bar/1 hr).

Sealing ring not contained in the scope of delivery.

\* Prices according to DEL notation.



**CuZn**  
37 Brass

**N** Nickel-plated

### Master data

|                     |               |
|---------------------|---------------|
| Item number         | 2090422       |
| Type                | 168 MS PG42   |
| Description 1       | Screw plug    |
| Manufacturer        | OBO           |
| Dimension           | PG42          |
| Material            | Brass         |
| Surface             | Nickel-plated |
| Surface standard    |               |
| Smallest sales unit | 25            |
| Unit of quantity    | Piece         |
| Weight              | 11.71 kg      |
| Weight unit         | kg/100 pc.    |


# Technical data sheet

Screw plug, PG thread

Item number: 2090422



## Dimensions

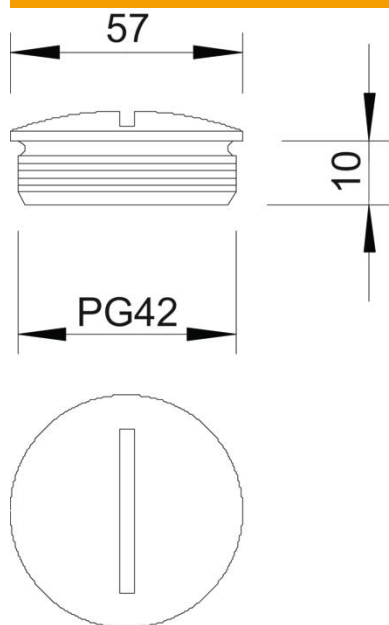

|             |       |
|-------------|-------|
| Dimension D | 57 mm |
| Dimension L | 10 mm |

## Technical data

|                               |         |
|-------------------------------|---------|
| explosion-proof               | no      |
| For Ex zone gas               | Without |
| For Ex zone dust              | Without |
| Thread                        | Pg 42   |
| Thread type                   | PG      |
| Nominal thread size metric/PG | 42      |
| Thread increase               | 1.59 mm |
| Fibre-glass reinforced        | no      |
| Halogen-free                  | yes     |
| Impact-resistant              | no      |
| Protection rating             | IP68    |