

# Technical data sheet

## Quick clip, black

Item number: 2149567



Flush-mounted clip to accept metric steel armoured pipes and heavy-duty insulating pipes, as well as Quick Pipe electrical installation pipes. Universal fastening options on walls and ceilings, both in indoor and protected outdoor areas. With slot for side alignment during mounting with wood screw or knock-in anchor. Toolless pipe mounting. Can also be arranged with OBO Multi-Quick or starQuick clip. M16 - M32 size can be screwed onto M6 thread. Recommended fastening spacing 50–60 cm, for max. extraction values F at a room temperature of 20 °C, see the table.



**PP** Polypropylene

### Master data

Item number	2149567
Type	2955 M25 SW
Description 1	Quick clip
Manufacturer	OBO
Dimension	M25
Colour	Jet black; RAL 9005
Material	Polypropylene
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.43 kg
Weight unit	kg/100 pc.


# Technical data sheet

Quick clip, black

Item number: 2149567



## Dimensions

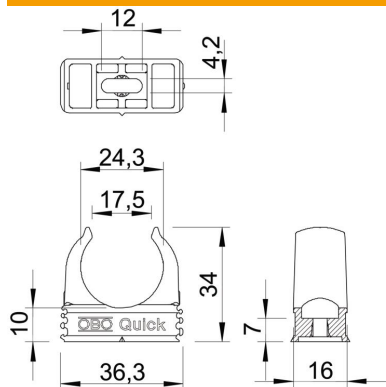

Dimension A	36.3 mm
Dimension B	16 mm
Dimension C	17,5 mm
Dimension D	24.3 mm
Dimension E	12 mm
Dimension F	4.2 mm
Dimension h	10 mm
Dimension H	34 mm

## Technical data

Expandable	yes
Number of cables/pipes	1
Pull-out value	90 N
Fastening type	Screw hole
Closed	no
Halogen-free	yes
With inlay	no
Nominal size/text	M25
Quick clip installation	Durchgangsloch,_auf_M6_Gewinde_aufschraubbar
UV-resistant	no