

# Technical data sheet

## Socket section 3-pin, black

Item number: 6108950



Socket section 3-pin, type WINSTA® MIDI with clamp connection.  
Single and multi-wire cables connectable without end sleeve. Not mounted with strain relief and terminable in situ. 250 V, 25 A.

Nominal cross-section: 2.5 mm<sup>2</sup>  
Stripping length: 55 mm  
Insulation removal length: 9 mm




PA Polyamide

### Master data

Item number	6108950
Type	BT-WIN 3P SW
Description 1	Socket section
Description 2	3pole, WINSTA
Available from	14.02.2020
Manufacturer	OBO
Dimension	76x35x15
Colour	Black
Material	Polyamide
Smallest sales unit	1
Unit of quantity	Piece
Weight	2 kg
Weight unit	kg/100 pc.

### Dimensions

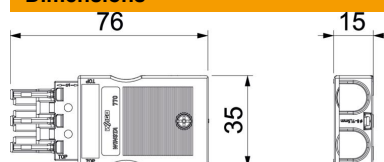

Length	76 mm
Width	35 mm
Height	15 mm

# Technical data sheet

Socket section 3-pin, black

Item number: 6108950



## Technical data

Connection type	Spring balancer connection
Connection cross-section (single-wire), max.	4 mm <sup>2</sup>
Connection cross-section (single-wire), min.	0.5 mm <sup>2</sup>
Connection cross-section (fine-wire), max.	4 mm <sup>2</sup>
Connection cross-section (fine-wire), min.	0.5 mm <sup>2</sup>
Type of locking	Integrated in plug connector
Version of the device connection	socket
Rated surge voltage	4
Fire load	0.12
Built-in variants	Installation part/plug connection
Halogen-free	yes
Contact material	CuSn
Mechanical encoding	yes
Nominal voltage	250 V
Nominal current	25 A
Surface treatment of the contacts	Miscellaneous
Pin labelling	L, N, PE
Pole number	3
Protection rating	IP20
Direction of insertion	Straight
Plug-in system	WINSTA® MIDI
Degree of soiling	3