


Technical data sheet

Cable tray MKS 85 FS

Item number: 6057500



MKS 85 = medium-duty cable tray system with a side height of 85 mm.
Magnetic shield insulation without cover 20 dB, with cover 50 dB.

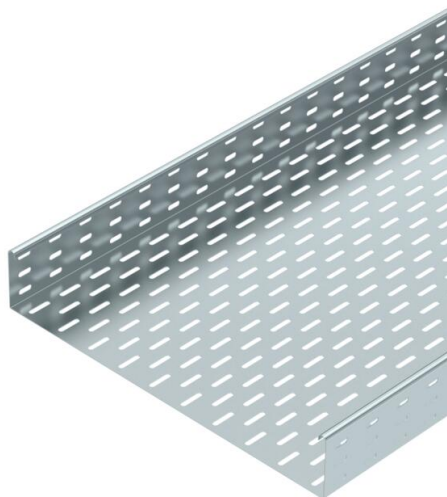

St Steel

FS Strip galvanized

Master data

| | |
|---------------------|------------------|
| Item number | 6057500 |
| Type | MKS 850 FS |
| Description 1 | Cable tray MKS |
| Description 2 | perforated |
| Manufacturer | OBO |
| Dimension | 85x500x3000 |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 3 |
| Unit of quantity | Metre |
| Weight | 488 kg |
| Weight unit | kg/100 m |


Technical data sheet

Cable tray MKS 85 FS

Item number: 6057500



Dimensions



| | |
|-----------------|----------|
| Dimension | 85 x 500 |
| Length | 3,000 mm |
| Length | 10 ft |
| Width | 500 mm |
| Width | 20 in |
| Height | 85 mm |
| Height | 3 in |
| Plate thickness | 0.04 in |
| Plate thickness | 1 mm |
| Dimension B | 500 mm |

Technical data

| | |
|-----------------------------------------|-----------------------|
| Connector version | Without connectors |
| Mounting system fastening type | Floor Ceiling Wall |
| Walkable | no |
| Maintain electrical functions | no |
| With cover | no |
| Mounting perforation in base | yes |
| NATO hole pattern | no |
| Usable cross-section | 423 cm ² |
| Usable cross-section | 42300 mm ² |
| Rustproof steel, pickled | no |
| Side perforation | yes |
| Wide-span version | no |
| Load test type according to IEC 61537 | Type II |
| Type of connector, cable support system | Screwed |

Technical data sheet


Cable tray MKS 85 FS

Item number: 6057500



Loads

| | |
|-----------------------------------|-----------|
| Insertable support spacings, min. | 1.5 m |
| Insertable support spacings, max. | 2.5 m |
| Support spacing 1.5 m | 1.75 kN/m |
| Support spacing 1.75 m | 1.4 kN/m |
| Support spacing 2.0 m | 1.1 kN/m |
| Support spacing 2.5 m | 0.5 kN/m |

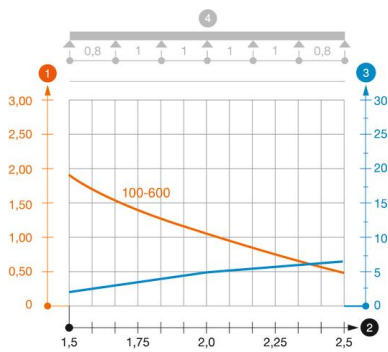

Load diagram, cable tray, type MKS 80

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width
- * From width 300 mm, tested with joint plate SSLB