

# Technical data sheet

## Cable tray SKS-Magic® 60, unperforated FS

Item number: 6059698



Unperforated cable tray with integrated quick fastening system. The usable length of the cable tray is 3,000 mm.

Continuous equipotential bonding is guaranteed without additional components.




**St** Steel

**FS** Strip galvanized

### Master data

|                     |                               |
|---------------------|-------------------------------|
| Item number         | 6059698                       |
| Type                | SKSMU 650 FS                  |
| Description 1       | Cable tray SKSMU              |
| Description 2       | unperforated, quick connector |
| Manufacturer        | OBO                           |
| Dimension           | 60x500x3050                   |
| Material            | Steel                         |
| Surface             | Strip galvanized              |
| Surface standard    | DIN EN 10346                  |
| Smallest sales unit | 3                             |
| Unit of quantity    | Metre                         |
| Weight              | 757.704 kg                    |
| Weight unit         | kg/100 m                      |

### Dimensions

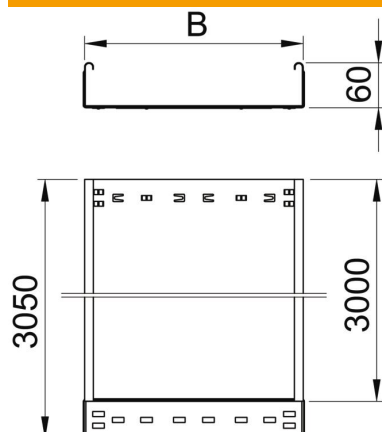

|                 |          |
|-----------------|----------|
| Length          | 3,050 mm |
| Width           | 500 mm   |
| Height          | 60 mm    |
| Plate thickness | 1.5 mm   |
| Dimension B     | 500 mm   |

# Technical data sheet

## Cable tray SKS-Magic® 60, unperforated FS

Item number: 6059698




### Technical data

|   |                       |
|---|-----------------------|
| Connector version                       | Integrated connector  |
| Mounting system fastening type          | Floor Ceiling Wall    |
| Walkable                                | no                    |
| Maintain electrical functions           | no                    |
| With cover                              | no                    |
| Mounting perforation in base            | no                    |
| NATO hole pattern                       | no                    |
| Usable cross-section                    | 298 cm <sup>2</sup>   |
| Usable cross-section                    | 29800 mm <sup>2</sup> |
| Rustproof steel, pickled                | no                    |
| Side perforation                        | no                    |
| Wide-span version                       | no                    |
| Load test type according to IEC 61537   | Type II               |
| Usable length                           | 3000 mm               |
| Type of connector, cable support system | Click fastening       |

### Loads

|                                   |           |
|-----------------------------------|-----------|
| Insertable support spacings, min. | 1.5 m     |
| Insertable support spacings, max. | 3 m       |
| Support spacing 1.5 m             | 2.6 kN/m  |
| Support spacing 2.0 m             | 1.9 kN/m  |
| Support spacing 2.5 m             | 1.1 kN/m  |
| Support spacing 3.0 m             | 0.55 kN/m |

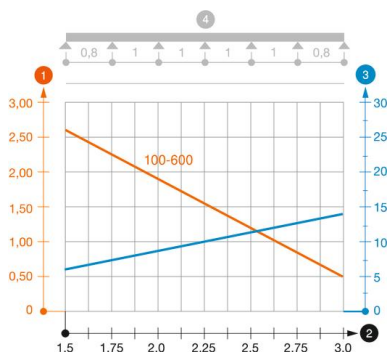

#### Load diagram, cable tray, type SKSMU 60

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width