

Technical data sheet

US 7 support A2

Item number: 6338704



Suspended support (U profile) with welded head plate.
For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 61.



A2 Stainless steel

2B Bright, treated

Master data

| | |
|---------------------|------------------------|
| Item number | 6338704 |
| Type | US 7 K 110 A2 |
| Description 1 | Support |
| Description 2 | with welded head plate |
| Manufacturer | OBO |
| Dimension | 70x50x1100 |
| Material | Stainless steel |
| Surface | Bright, treated |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 531 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

US 7 support A2

Item number: 6338704



Dimensions

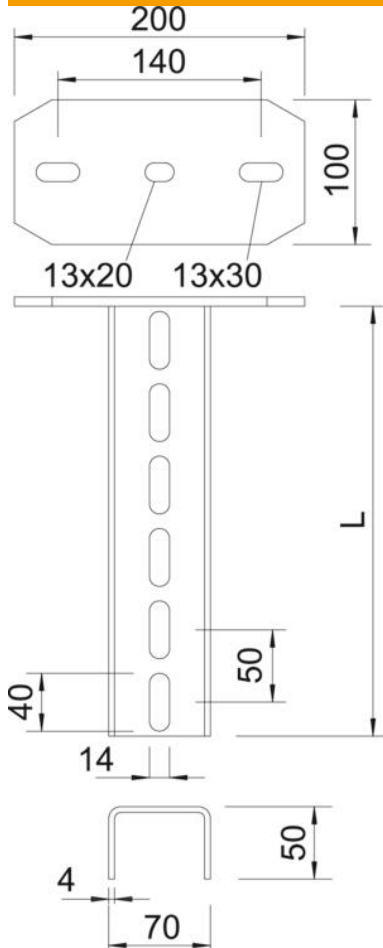

| | |
|--------|----------|
| Length | 1,100 mm |
| Width | 70 mm |
| Height | 50 mm |

Technical data

| | |
|-------------------------------|--------------------|
| Type of perforation | 3 sides perforated |
| Version for | U profile |
| Bracket length 200 | 8.3 kN |
| Bracket length 400 | 5 kN |
| Bracket length 600 | 3.5 kN |
| Maintain electrical functions | no |
| Material thickness | 4 mm |
| Maximum tensile load | 11 kN |


Technical data sheet

US 7 support A2

Item number: 6338704



Loads

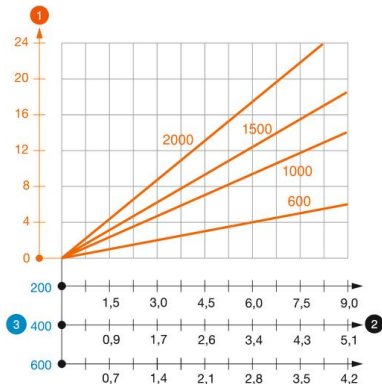

Load diagram, U support, type US 7 K VA

- 1** Bending of the end of the suspended support at permitted bracket load
- 2** Permitted bracket load in kN without man load
- 3** Bracket length in mm
- Load curves with support lengths in mm

Characteristic anchor load values for U support, type US 7 K

| Anchor type | Max. load [kN] | | | | | |
|-----------------|--------------------|------|------|------|------|------|
| | Bracket width [mm] | | | | | |
| | 110% | 210 | 310 | 410 | 510 | 610 |
| BZ3 10x90/0-30 | 3.97 | 3.03 | 2.44 | 2.04 | 1.76 | 1.54 |
| BZ3 12x110/0-35 | 5.16 | 3.90 | 3.15 | 2.64 | 2.27 | 1.99 |

Max. total load $F = \text{cable weight} + \text{cable tray} + \text{bracket} + \text{suspended support}$. The tabular values for double-sided loads take the available axis spacing $a_i = 10 \text{ cm}$ into account. The stated values are based on uncracked concrete of compressive strength C20/25. Please comply with the installation conditions of ETA(anchors).